


# "CARPENTER" building set. Delivery list (2022)



"AIG-konstrukcijas" SIA  
[www.aigkonsrukcija.lv](http://www.aigkonsrukcija.lv)  
+371 294 080 51  
+371 292 787 05

**GENERAL:**

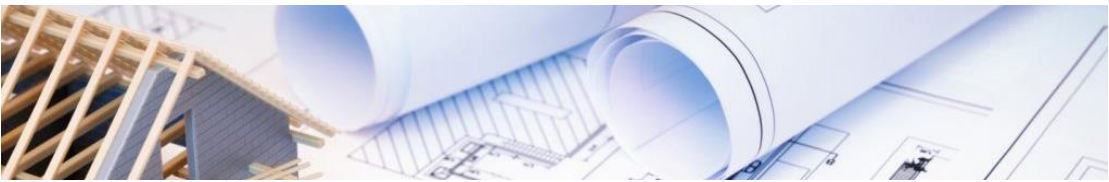

House drawings (floor plans, elevations, cross section).	Include
House assembling drawings.	Include
Delivery list.	Include

**EXTERNAL WALL PANELS:**



1	Timber frame C24, 195 mm.	Built in
2	Wind isolation (diffusion membrane).	Built in
3	Outer battens 32 mm.	Built in
4	Insulation tape between panels.	Built in
5	PE hydro isolation.	Built in
6	Components for assembling	Built in



INTERNAL WALL PANELS:

1	Timber frame 95 till 145mm. Columns and beams.	Built in
2	PE hydro isolation (for ground floor panels).	Built in
3	Insulation tape under panels.	Built in
4	Components for assembling.	Built in



ROOF AND CEILING CONSTRUCTION




1	Trusses, rafters (snow load 175 kg/m2).	Separate materials
2	Roof underlay (~130g/m2).	Separate materials
3	Wooden battens 32mm (c/c = truss c/c) impregnated.	Separate materials
	Wooden battens 32mm c/c~250mm (impregnated).	Separate materials
4	Components for assembling.	Separate materials






## EXTERNAL WALL FOR LOFT

1	Timber frame our truss.	Built in
2	Wind isolation (diffusion membrane in warm insulation area).	Built in
3	Outer battens 32 mm.	Built in
4	Components for assembling.	Separate materials

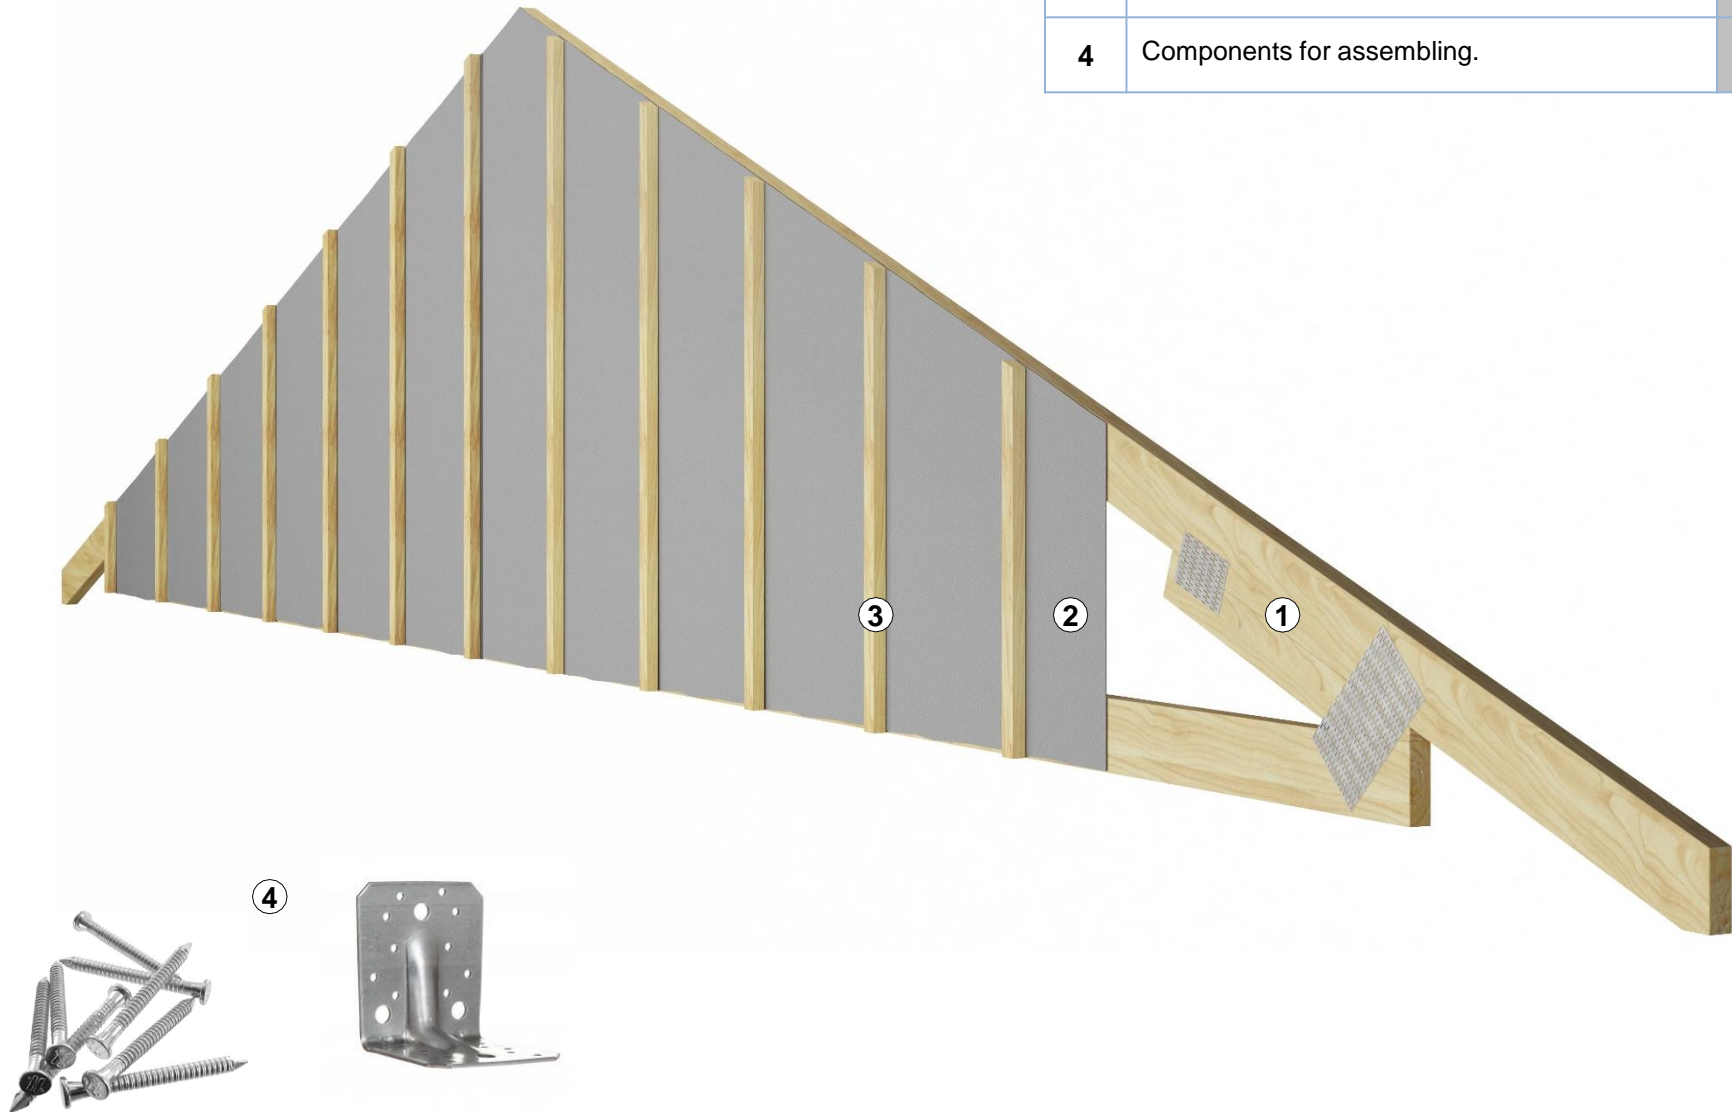

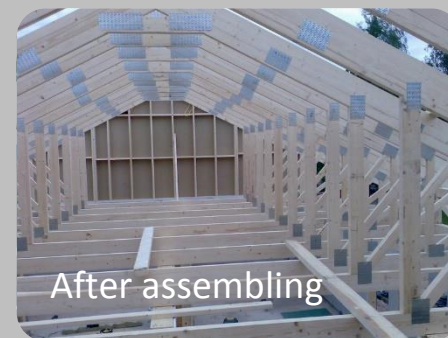





## Additional explanations.

- The pictures in this description have indicative character.
- Depending on the supplier's material assortment and specifications changes, the materials can change, which does not deteriorate the properties of the product.
- According to the individual needs of the client, building sets, their contents and quantities of materials may vary.
- "AIG-konstrukcijas" provide assembling services in the following ways:
  - a) We provided assembling scheme for local assemblers;
  - b) We appoint an engineer, who leads the local assemblers work in agreed time;
  - c) "AIG-konstrukcijas" full assembling service:" everything that has been delivered is assembled".



"AIG-konstrukcijas" Ltd  
"Bērzkalni", Ikšķiles novads, LV-5052, Latvia.

E-pasts: [info@aig-familyhouses.eu](mailto:info@aig-familyhouses.eu)

Jānis Jansons  
Phone.: +371 292 787 05

Aivis Grīnmanis  
Phone.: + 371 294 080 51